

TIGONIS PREMIUM ACRYLIC DISTEMPER



**PREMIUM
QUALITY**



PRODUCT DESCRIPTION



TIGONIS Acrylic Distemper is quality water based wall coat for Interiors and is supplied in paste form. It is proper finish paint for interior walls which demand beautifully decorated surfaces without any glares of light reflection. It can be used for the decoration of fully matured plaster work, concrete, brickwork, ceiling wall and asbestos surfaces.

PERFORMANCE FEATURES & BENEFITS

- ▶ Easy application
- ▶ Bright and matt finish Shades
- ▶ Washable properties
- ▶ Eye soothing matt finish
- ▶ Economical & good value for money

SURFACE PREPARATION

Ensure the surface is clean, dry and free from dirt, grease, wax etc. Clean the surface by using emery paper and thereafter wipe clean. Treat fungus affected areas using proper Fungicidal Solutions. Allow to react for 6-8 hrs. Apply a coat of TIGONIS Cement Primer followed by TIGONIS Wall Putty to make a uniform surface and repeat a coat of INTERIOR Cement Primer. Now apply 2-3 coats of TIGONIS Acrylic Distemper of desired Shade.

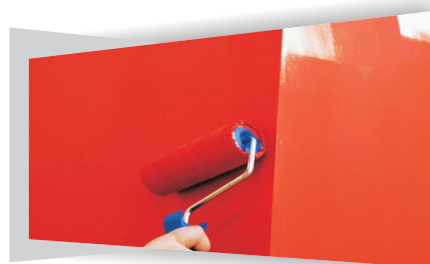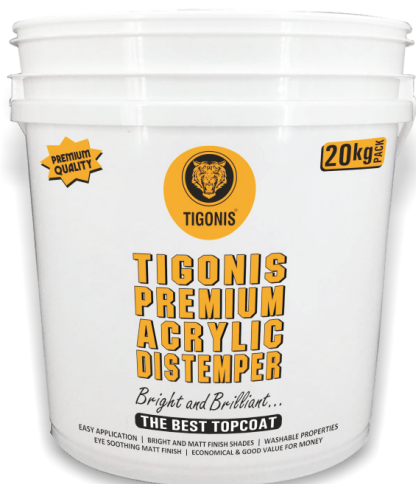

TIGONIS PREMIUM ACRYLIC DISTEMPER

**PREMIUM
QUALITY**



TECHNICAL DATA

Coverage*	110-120 sq. ft / Kg/ coat, on smooth and non-absorbent surfaces
Drying Time	Surface Dry: 30 minutes.
Overcoat ability	4-6 hrs (@27± 2C & RH 60 ±5%):
Thinning	Add 50-60% Potable Water by Weight or as per desired applicable viscosity
Gloss/ Sheen	Matt And Smooth
Flash Point	NA
Stability of Thinned Paint	Use within 24 hrs.
Shelf Life	12 months from date of manufacture
Pack Size	5, 10 & 20 Kg containers
Colour Shades	Please follow the Shade Card

*Actual coverage may vary depending on method & condition of application, surface roughness & surface porosity.

PRECAUTIONS

- ▶ Store in ambient conditions, ventilated locations & away from heat sources.
- ▶ Keep away from children.
- ▶ In case of eye / skin contact, wash with plenty of water.
- ▶ Inhalation / Injection is dangerous. In either case, move to fresh air & consult a Doctor.
- ▶ Do not apply when ambient temperature might drop to a level below 10°C within 4 hrs of application.
- ▶ New plastered surface should be allowed to cure for minimum 12 weeks.
- ▶ Avoid extra thinning for better results.
- ▶ It can be tinted with Stainer before thinning. Do not add more than 5% Stir well.
- ▶ The container must be tightly closed when not in use Strain before use.
- ▶ Use safety equipment like rubber/gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

Apply finishing coat within 7-8 days of primer application.

NOTE : WE HAVE THE FACILITY TO SUITABLY CUSTOMIZE ANY SHADE AS PER YOUR SPECIAL REQUIREMENTS. APPLICABLE FOR BULK ORDERS ONLY.



BENGAL BUILDING SOLUTIONS PVT. LTD.

57 G, K. N. Sen Road, Kolkata - 700042, Phone : 033 - 2442 0337/38

E: info@bbspl.co.in | W: www.bbspl.co.in

Works : Ramkrishnapur More, Gotalahat Road, Amtala, Kolkata - 743503

MANUFACTURED FOLLOWING BIS STANDARDS